FLG/FLW Feature Light for gunite pools

CONTENTS

1) Feature Light fixture
1) Broadcast Lens (B11458)
1) Large lens o-ring (22-15006-00)
1) Small lens o-ring (A8891)
1) Centering device (A9904)
1) Centering disc (A9787)

USE A FEW WRAPS OF TEFLON TAPE AROUND THE THREADS OF THE LENS!

INSTRUCTIONS

1) BEFORE GUNITE: Run 1" PVC SCH 40 to the Feature Light location so the pipe will be below water level. The pip should be DIRECTLY under the water feature it is lighting. Gunite the pool as normal.

2) AFTER GUNITE: Cut the pipe flush with the gunite. Run the fiber kit through the Feature Light and through the conduit towards the illuminator. Place the large gasket on the lens, making sure it seats on the flange (FIG A). Place the small o-ring in the groove at the base of the lens, and use a few wraps of Teflon tape around the threads of the lens. Thread the lens into the fixture and tighten it snugly.

3) Apply a generous amount of clear silicone to the stub and insert the Feature Light into the 1" PVC pipe. Level the Feature Light so it is straight up.

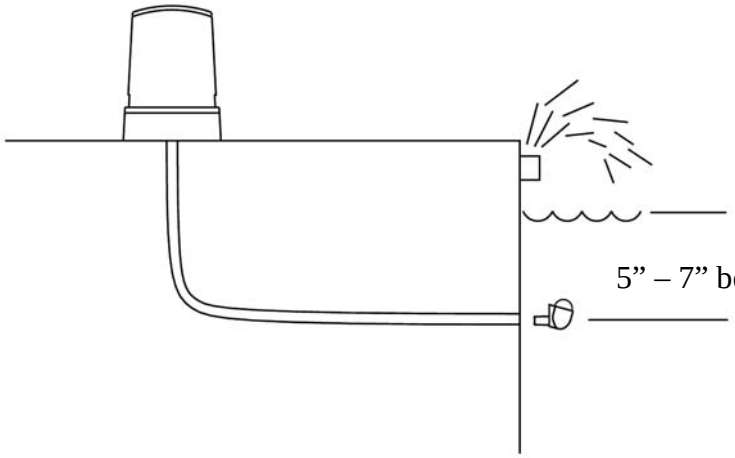

FIG. A

PM10103, Rev. D